






0473

WALL



WARNING

ANY MODIFICATION TO THIS FITTING IS FORBIDDEN WITHOUT PRIOR AUTHORIZATION

Our policy is the constant improvement of the product. We reserve the right to modify the characteristics of the equipment without prior notice. Please refer to the website www.arcluce.it for this and other technical documents continually updated.

All information is presented in good faith. no responsibility may be imputed to us for errors, omissions or incorrect interpretations.

The photographs and drawings are within the limits of the quality of the printed reproduction, not binding and indicative only.



Directive 2002/96/CE (Waste Electrical and Electronic Equipment - WEEE). The crossed out wheeled bin label that this product should not be disposed how the normal household waste stream, but with a separate collection; this in order to prevent potential negative consequences for the environment and the human health. For more details on available collection facilities please contact your local government office or the dealer where you purchased this product.


The safety and the proper functioning of the fitting is guaranteed only respecting the electrical Standards and this mounting instructions; therefore it's necessary to keep them.

Installation should be carried out by a suitable qualified person. Always refer to electrical data on the fixture label.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. Only use original ARCLUCE spare parts.



Turn off power before maintenance.




Replace any cracked shield.



Risk group 2 (IEC/TR62778). Do not stare at operating LED. The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 2 m is not expected.

SPECIFICATIONS

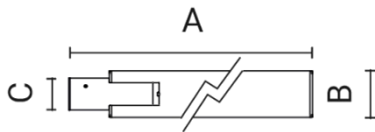

MECHANICAL

Dimensions:	A: 491 / 784 mm B: 150mm C: Ø102mm
Weight:	4.6 Kg
Rated Ta:	-20°C ÷ +25°C
Wind exposure:	0.07 / 0.11m ²

ELECTRICAL

Wiring:	ON/OFF, DALI
Input:	220-240V 50/60Hz

INSTALLATION

1. Secure base plate to wall using appropriate screws and dowels (by others).
2. Wire plug according to diagram.
3. Connect plug with socket and slip fixture on base.
4. Tighten grubs.

1

Use only appropriate screws and dowels (by others).

Pay attention to anchor bolts orientation to obtain correct aiming of light.

2 Turn off power.

ON/OFF

OD: Ø9÷12 mm

L - BROWN
PE - GREEN/YELLOW
N - BLUE

DALI

OD: Ø9÷12 mm

L - BROWN
N - BLUE
PE - GREEN/YELLOW
DA - BLACK
DA - GRAY

3

Connect plug to socket and secure with lock ring.

The cable connection must have an IP rating at least equal or higher than the fixture itself.

Do not pinch the cable.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

4

Lock uniformly the grubs to obtain a correct alignment (6 Nm).

Data di emissione: 10.10.2018

Stato di modifica: M1

Codice: 655500.11